


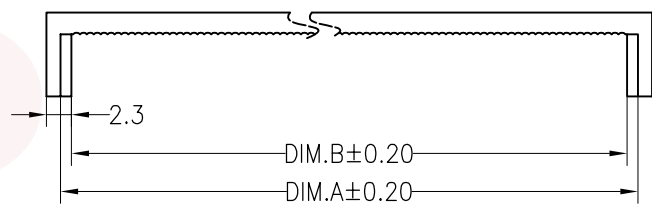







**SPECIFICATIONS**  
 Rated Current:1.0AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass/Phosphor Bronze  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

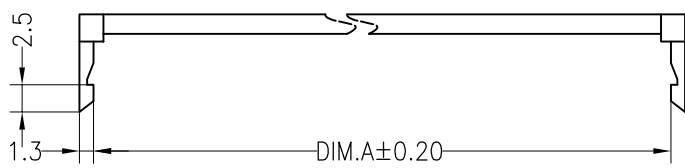


	NO.OF.PINS	A	B	C	D
A1	6	6.01	4.11	3.18	2.54
A1	8	7.28	5.38	4.45	3.81
A1	10	8.55	6.65	5.72	5.08
A1	16	12.36	10.46	9.53	8.89
	20	14.90	13.00	12.07	11.43
	26	18.71	16.81	15.88	15.24
	30	21.25	19.35	18.42	17.78
	34	23.79	21.89	20.96	20.32
	40	27.60	25.70	24.77	24.13
	50	33.95	32.05	31.12	30.48
A1	60	40.30	38.40	37.47	36.83
	68	45.38	43.48	42.55	41.91
	80	53.00	51.10	50.17	49.53
	100	65.70	63.80	62.87	62.23

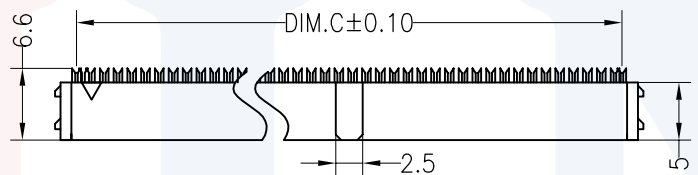

W=With Bump

N=Without Bump

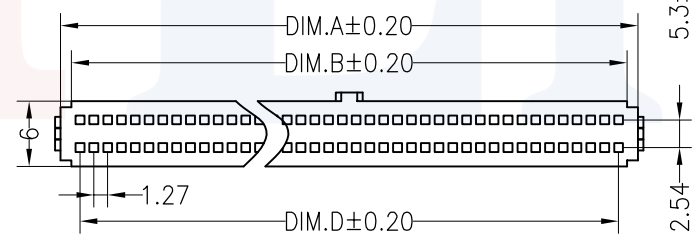

**Ordering Information**

5343 XX Y B XX B X 01

No.of Pins: 20~100P  
 Contact Material: B=Brass, P=Phosphor Bronze  
 Contact Plating: NO:Gold Flash/Ni, GO:Gold Flash  
 Option Type: W=With Bump, N=Without Bump

**JILN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.	5343XXYBXXBW01
TITLE:	1.27*2.54 IDC NPin

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	liujianjun	16.07.04	SCALE	FIT
				Angle	±3°					
A1	2016.07.02	添加其他PIN 尺寸		X.X	±0.30	DRAW			UNIT	mm
A0	2012.03.28	NEW DRAWING		X.XX	±0.20	CHECK			SIZE	A4
				X.XXX	±0.10				SHEET	1/1
				DIM	TOL	APPROVE			PROJ.	