



HSF RoHS

SPECIFICATIONS
PERFORMANCE

Electical Rating: AC/DC 50V 0.5A
Contact Resistance: 30mΩ Max
Insulation Resistance: 500MΩ Min
Withstand Volt: 500V AC/minute
Oprratng Temperature: -40°C to +105°C






Material
Contact: Phosphor Bronze Gold-Plated
Locating Plate: Brass Sn Over Ni
Housing: LCP UL94V0
Max.Processing Temp: 260°C ± 5° 5S

20~60P  0.12
>60P  0.15

Ordering Information

3724 X XXX 070 XX X X OX

F=Female
M=Male
No.of pins
20P~100P
Plastic Hight
070=7.0mm
Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
S0:1.5U" Gold/Tin
S1:3U" Gold/Tin
Insulator
Material
Option
D=BK-PA46
E=BK-PA9T
F=BK-LCP
Packing
T:Tube
R:Reel

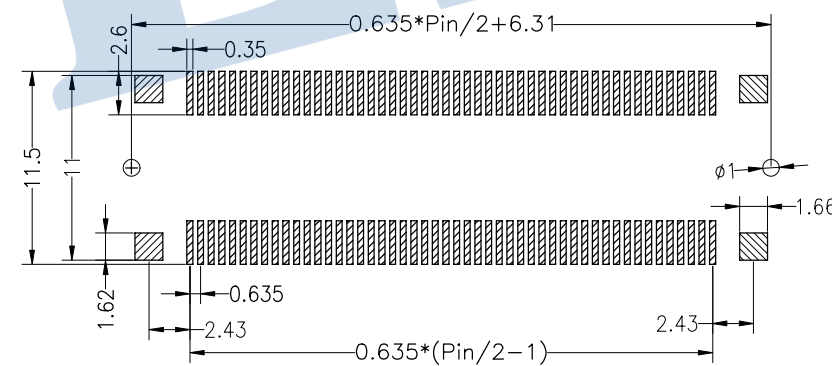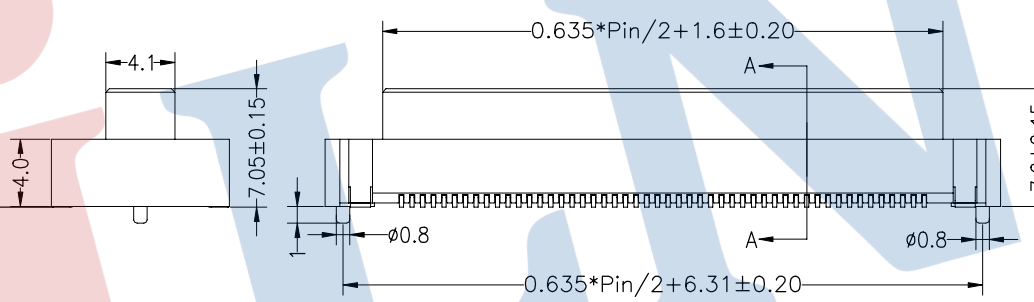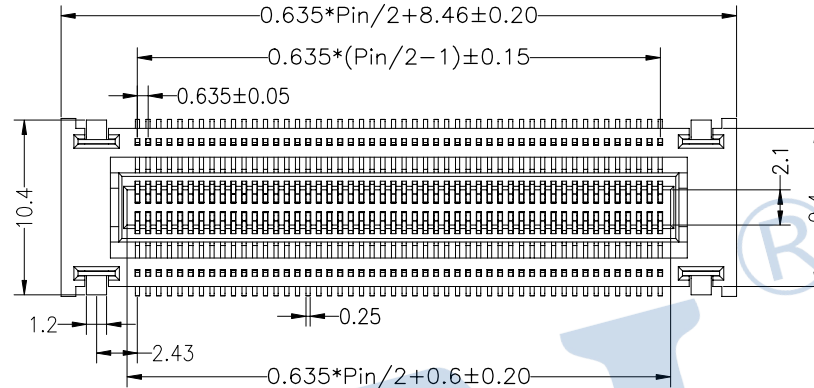

P.C.B Layout

Mating Draw (Ref)

				OPERATION		DRAW	RICH LIN	22.07.08	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5992	
				X.X	±0.30							
				X.XX	±0.20	APPROVE	SIZE	A4	PART NO.	3724XXX070XXX0X		
A0	2022.07.08	NEW DRAWING		X.XXX	±0.10		DIM	TOL	SHEET	1/1	TITLE:	0.635mm 浮动式 BTB NPin H7.0 Female
REV	DATE	MODIFICATION DESCRIPTION		CHANGE		PROJ.			