

HSF RoHS

SPECIFICATIONS

PERFORMANCE

Current rating: 0.4A

Voltage rating: 100V AC

Insulation Resistance: 1000MΩ min

Withstanding voltage: 300V AC/1 min

Contact Resistance: 45mΩ max



Operatng Temperature: -40°C to +105°C

Material




Contact: Phosphor Bronze

Housing: PA9T, UL94-V0

Soldering temperature: 260°C±5° 5S

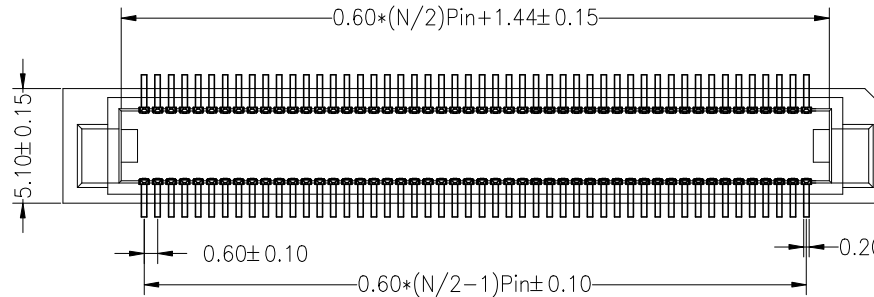

ASSEMBLY

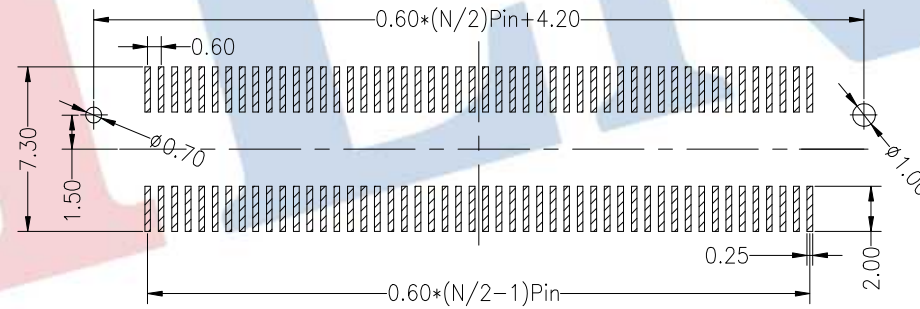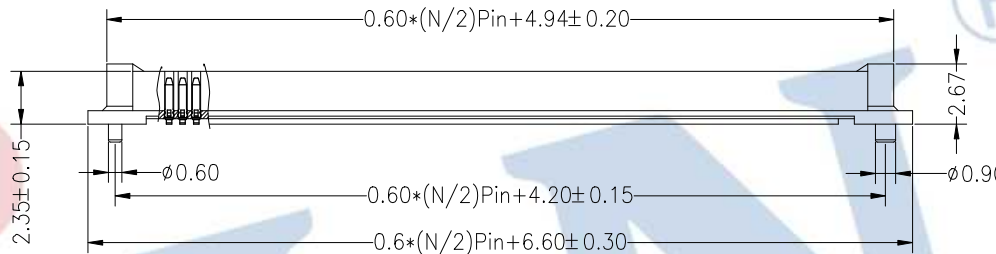

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

3721 F XXX 026 XX E X 0X

F=Female
M=Male
No.of pins
60,80,100P
Plastic Hight
026=2.67mm
Contact Plating
G2:1.5U" Gold
G3:3U" Gold
G4:5U" Gold
G5:10U" Gold
S0:Gold Flash/Tin
Packing
R=Reel
T=Tube
code stream
01~99

A	A0	2022.06.30	NEW DRAWING	CHANGE	OPERATION	DRAW	Jelly Feng	2022.06.30	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel : 86-755-27483253 Fax: 86-755-2997-5588	
	REV	DATE	MODIFICATION DESCRIPTION		X.X ±0.30	CHECK			UNIT	mm		
					X.XX ±0.20				SIZE	A4	PART NO.	3721FXXX026XXEX0X
					X.XXX ±0.10				SHEET	1/1	TITLE:	0.6BTB NPin H2.35 Female
				Angle ±3°				PROJ.	⊕			
				DIM TOL								