



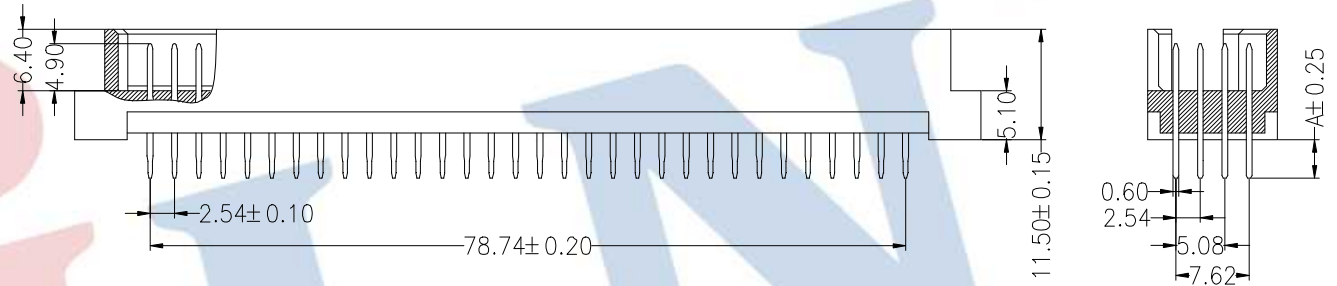

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Copper Alloy
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C For 5 Second(PBT insulator)

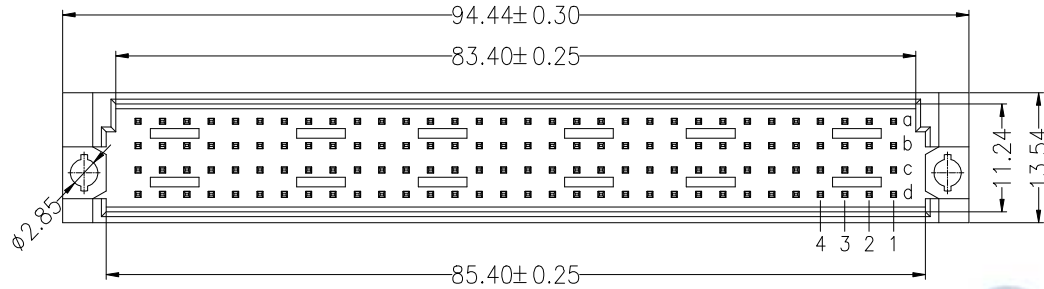

Ordering Information

3511 4 128 A M S XX B N A X


No.of Pins
NPin
N=128

Contact Type
M=Male

Contact Plating
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin

Contact Material
B=Brass

Stream Code

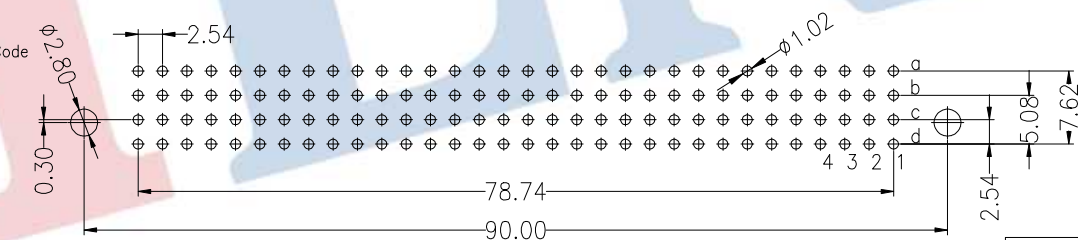

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

A	A0	2023.03.29	NEW DRAWING	CHANGE	OPERATION	DRAW	Jelly Feng	2023.03.29	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	PART NO.	35114128AMSXXBNAX			
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	X.X	±0.30	CHECK		UNIT	mm			TITLE:	欧式插座 公座 四排 180度 无鱼叉 成品系列图		
					X.XX	±0.20				APPROVE					SIZE	A4
					X.XXX	±0.10										SHEET
				Angle	±3°	DIM	TOL	PROJ.	☉							