


HSF RoHS


SPECIFICATIONS

Current Rating:3.0AMP
 Contact Resistance:10mΩ Max
 Dielectric Strength:Min 1000V RMS
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260°C±5°C, 10s(PPS insulator)


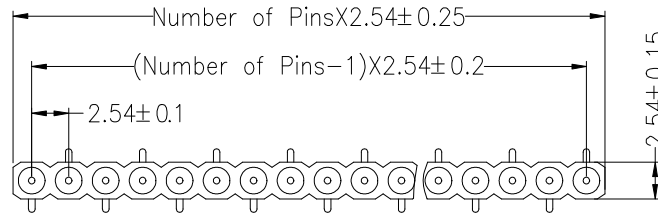


type 1



type 2

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

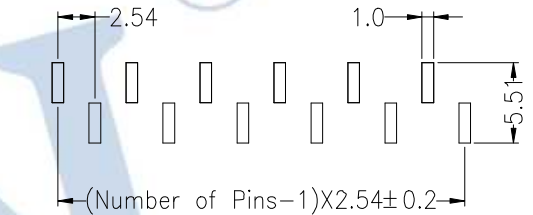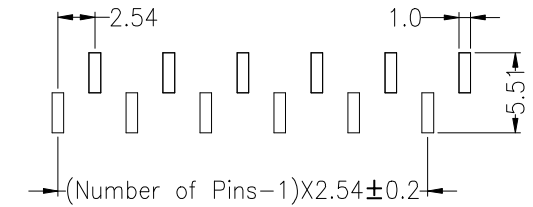

Ordering Information



3610 30 1 XX M XX 100 X X

No.of Pins
2-40

Contact Plating
SN: Tin
G1: Gold Flash
G2: 2U" Gold
G3: 3U" Gold
G4: 5U" Gold
G5: 10U" Gold

Length
100=10.0mm

Packing
O=PE Bag
A=Tray
T=Tube

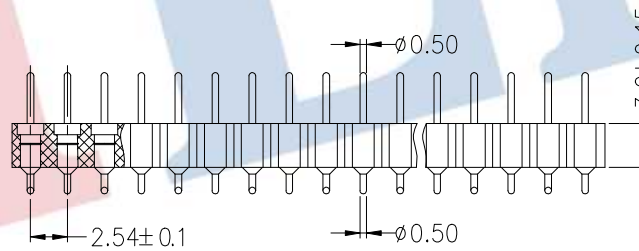

		OPERATION		DRAW	yiyusheng	16.06.24	SCALE	FIT
		X.X	±0.30					
		X.XX	±0.20	CHECK			UNIT	mm
		X.XXX	±0.10				SIZE	A4
A0	2016.06.24	NEW DRAWING		APPROVE			SHEET	1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE				PROJ.	☯

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3610301XXMXX100XX

TITLE: 2.54X3.0 双头针 SMT L=10.0